

BFMX BATH BAR SERIES



DESCRIPTION

Decorative metal end caps with repeating "X" pattern on acrylic. Uses 2 instant start T8 fluorescent lamps.

Mounting: Fixtures designed for surface mounting vertically along each side or horizontally across top of mirror. Also suitable for corridor or stairway wall or ceiling mount.

CONSTRUCTION


Housing: Die-formed 21-gauge cold rolled steel with baked white enamel finish.
Diffuser: Extruded acrylic lens with die formed stamped post-painted steel end caps, fully encloses housing.

ELECTRICAL

Completely wired with solid state electronic instant start ballast, ready to direct wire install over standard wall junction box. 120v, 60Hz, UL/CUL damp location listed.

OPTIONS

Add "RST" for Rust ends.
Add "ERTH" for Earth ends.
Add "OCOP" for Old Copper ends.
Add "STUC" for Stucco ends.
Add "EB" for emergency battery.
Add "L" for low ballast factor rebate-eligible fixture

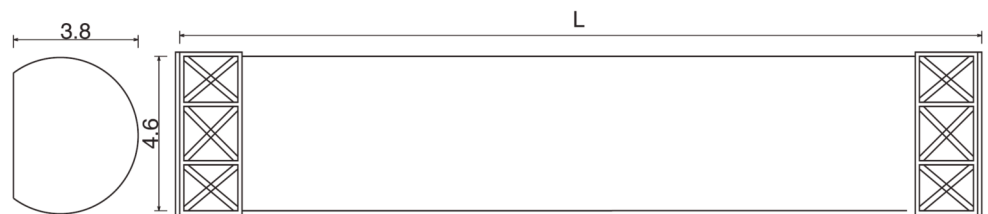

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
BFMX217E	(2) F17T8	24 1/2"
BFMX225E	(2) F25T8	36 1/2"
BFMX232E	(2) F32T8	48 1/2"