

DOUBLE SIDE MOUNT STRIP SERIES



DESCRIPTION

A versatile fluorescent strip fixture configured with lamps on both sides. Suitable for a wide range of display and concealed applications where shallow size and maximum light is needed in a moderately priced fixture. Uses T8 lamps.

Mounting: Fixtures designed for direct surface mount. Can also be chain, cable, or stem hung. Can be installed as individual units, in continuous rows, or in conjunction with other fixtures.

CONSTRUCTION

Housing: Die-formed 21-gauge cold rolled white steel.

Cover: snap-on die-formed matching white steel.

Finish: Phosphate coated, baked white enamel with 85% reflectivity.

ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations

OPTIONS


Add "SJT" for grounded cord & plug. Specify length as well as end or back.

Add "CO" for convenience outlet

Add "RIV" for Rivnut mounting inserts. Specify location and #8 or 1/4-20 threads

Add "CT" for Cold Temperature.

Add "277" for 277v ballast

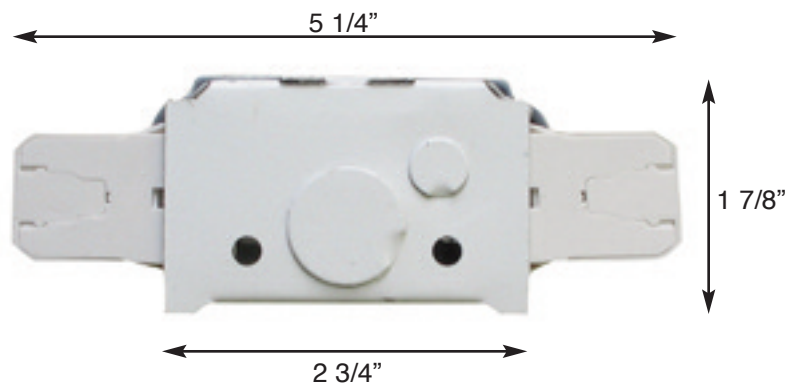

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
DSM214E	(2) F14T8	15"
DSM215E	(2) F15T8	18"
DSM217E	(2) F17T8	24"
DSM225E	(2) F25T8	36"
DSM225T/E	(4) F25T8	72"
DSM232E	(2) F32T8	48"
DSM232T/E	(4) F32T8	96"
DSM240T8/E	(2) F40T8	60"