


## DOUBLE SIDE MOUNT STRIP SERIES

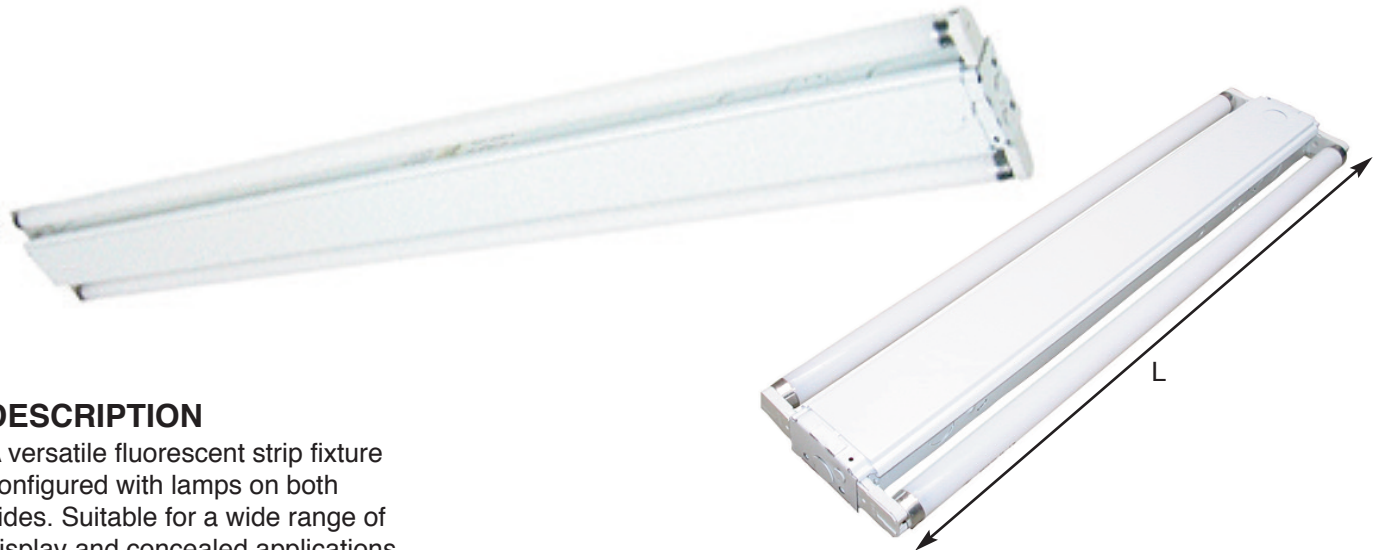

### DESCRIPTION

A versatile fluorescent strip fixture configured with lamps on both sides. Suitable for a wide range of display and concealed applications where shallow size and maximum light is needed in a moderately priced fixture. Uses T8 lamps.

**Mounting:** Fixtures designed for direct surface mount. Can also be chain, cable, or stem hung. Can be installed as individual units, in continuous rows, or in conjunction with other fixtures.

### CONSTRUCTION

**Housing:** Die-formed 21-gauge cold rolled white steel.

**Cover:** snap-on die-formed matching white steel.

**Finish:** Phosphate coated, baked white enamel with 85% reflectivity.

### ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations


### OPTIONS

Add "SJT" for grounded cord & plug. Specify length as well as end or back.

Add "CO" for convenience outlet  
Add "RIV" for Rivnut mounting inserts. Specify location and #8 or 1/4-20 threads

Add "CT" for Cold Temperature.

Add "277" for 277v ballast

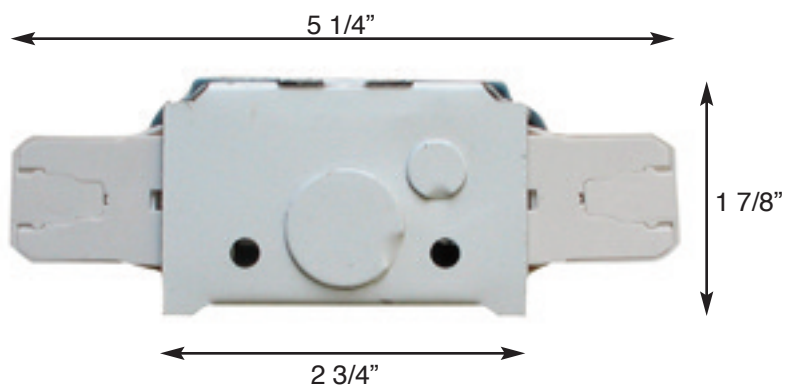

### ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
DSM214E	(2) F14T8	15"
DSM215E	(2) F15T8	18"
DSM217E	(2) F17T8	24"
DSM225E	(2) F25T8	36"
DSM225T/E	(4) F25T8	72"
DSM232E	(2) F32T8	48"
DSM232T/E	(4) F32T8	96"
DSM240T8/E	(2) F40T8	60"