

IND INDUSTRIAL SERIES



DESCRIPTION

The standard for warehouse and shop lighting. Batwing reflectors help to capture and direct the light from the two lamps down to the work area. Uses standard T8 or high output lamps.

Mounting: Fixtures designed for direct surface mount, chain, cable, or stem hanging. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

CONSTRUCTION

Housing: Die-formed 21-gauge cold rolled steel.

Cover: 1/4-turn fastened die-formed white steel reflector encloses wiring.

Finish: Phosphate coated, baked white enamel with 85% reflectivity.

ELECTRICAL


120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations.

OPTIONS

Add "SJT" for grounded cord & plug, specify length, plus out end or back.

Add "277" for 277v ballast
Add "L" for low ballast factor rebate-eligible fixture

Add "H" for high ballast factor
Cable hanging and chain hanging kits available separately.

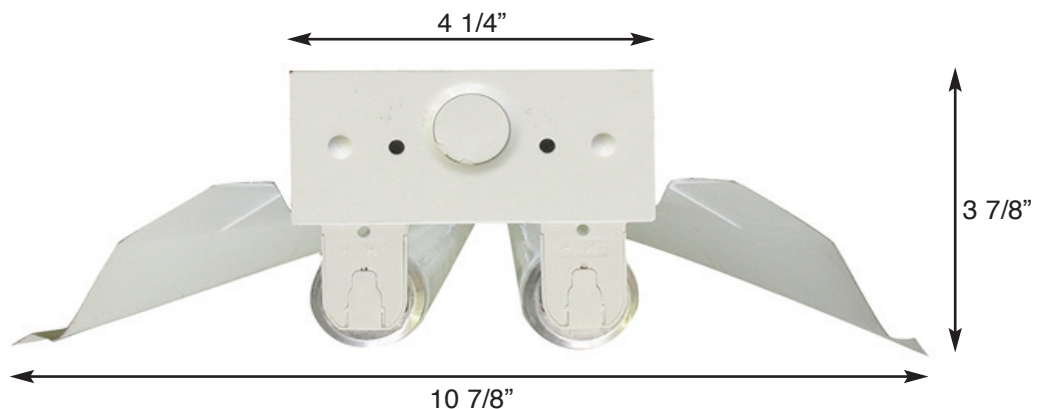

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
IND232E	(2) F32T8	48"
IND232T/E	(4) F32T8	96"
IND248E/HO	(2) F48T12/HO	48"
IND296E/HO	(2) F96T12/HO	96"
IND332E (High Bay)	(3) F32T8	48"
IND332T/E (High Bay)	(6) F32T8	96"