


## IND INDUSTRIAL HIGHBAY SERIES

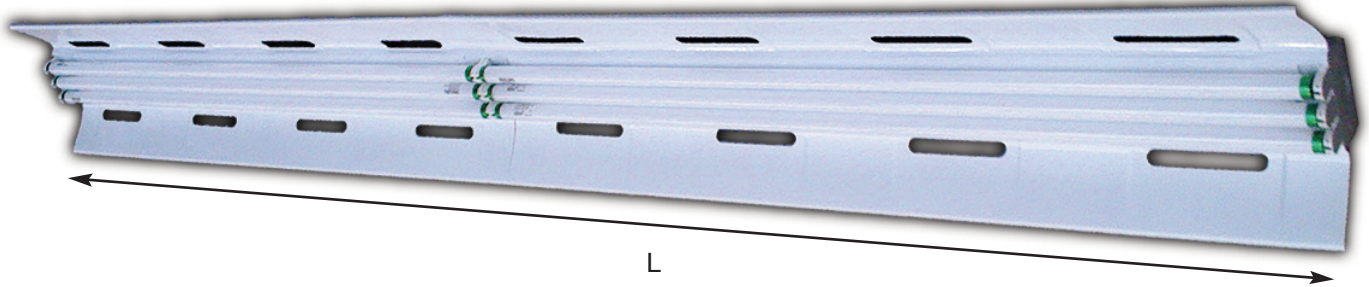

### DESCRIPTION

Ideal for high-bay fluorescent lighting. Batwing reflectors help to capture and direct the light from the three lamps down to the work area. Uses standard T8 lamps.

Mounting: Fixtures designed for direct surface mount, chain, cable, or stem hanging. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

### CONSTRUCTION

Housing: Die-formed 21-gauge cold rolled steel.

Cover: 1/4-turn fastened die-formed white steel reflector encloses wiring.

Finish: Phosphate coated, baked white enamel with 85% reflectivity.

### ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations.


### OPTIONS

Add "SJT" for grounded cord & plug, specify length, plus out end or back.

Add "277" for 277v ballast

Add "L" for low ballast factor rebate-eligible fixture

Add "H" for high ballast factor  
Cable hanging and chain hanging kits available separately.

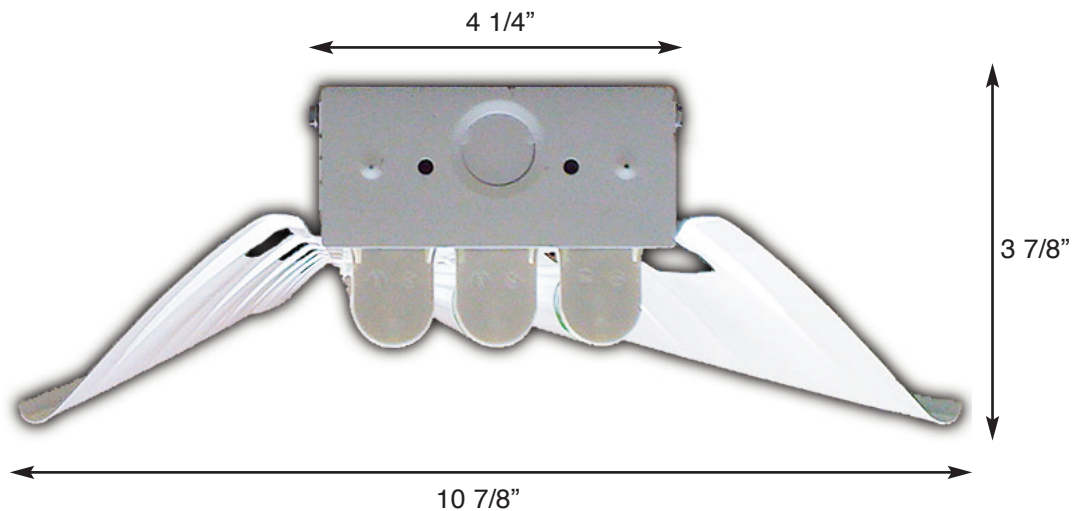

### ORDERING INFORMATION

| <u>Model Number</u> | <u>Lamps</u> | <u>Length (L)</u> |
|---------------------|--------------|-------------------|
| IND332E HB          | (3) F32T8    | 48"               |
| IND332T/E HB        | (6) F32T8    | 96"               |