


## IND INDUSTRIAL HIGHBAY SERIES

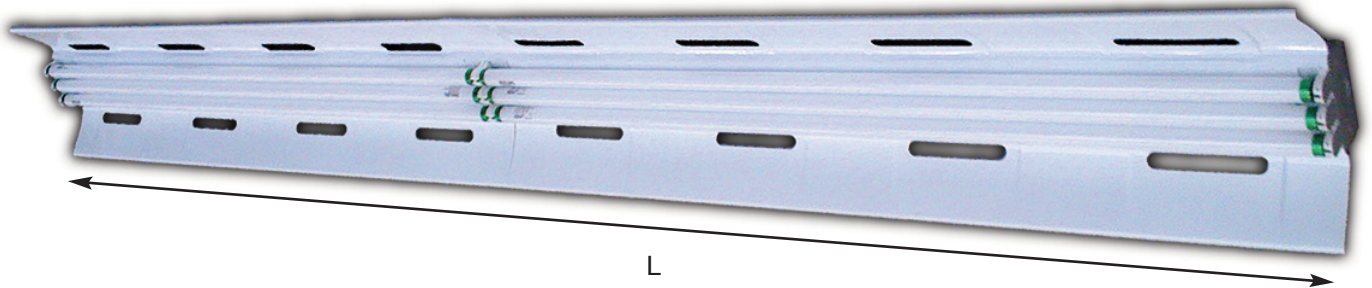

### DESCRIPTION

Ideal for high-bay fluorescent lighting. Batwing reflectors help to capture and direct the light from the three lamps down to the work area. Uses standard T8 lamps.

Mounting: Fixtures designed for direct surface mount, chain, cable, or stem hanging. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

### CONSTRUCTION


Housing: Die-formed 21-gauge cold rolled steel.  
Cover: 1/4-turn fastened die-formed white steel reflector encloses wiring.  
Finish: Phosphate coated, baked white enamel with 85% reflectivity.

### ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations.

### OPTIONS

Add "SJT" for grounded cord & plug, specify length, plus out end or back.  
Add "277" for 277v ballast  
Add "L" for low ballast factor rebate-eligible fixture  
Add "H" for high ballast factor  
Cable hanging and chain hanging kits available separately.

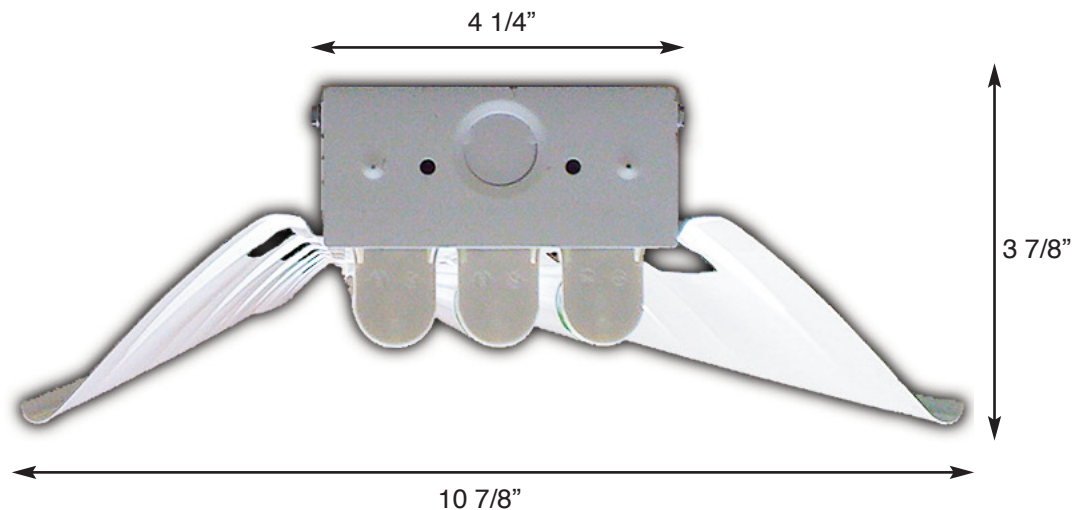

### ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
IND332E HB	(3) F32T8	48"
IND332T/E HB	(6) F32T8	96"