


KDS TOP MOUNT STRIP SERIES

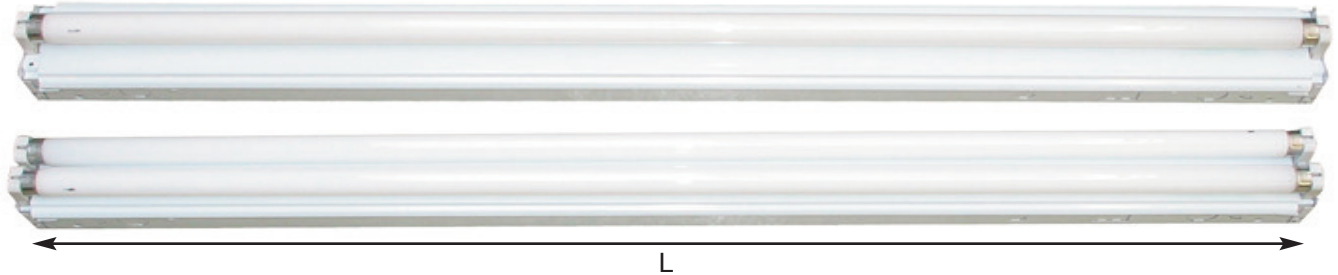

DESCRIPTION

The basic fluorescent strip fixture configured with one or two lamps on top. Suitable for a wide range of commercial and industrial uses for concealed and general lighting. Uses T8 or T12 lamps. Mounting: Fixtures designed for direct surface mount. Can also be chain, cable, or stem hung. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

CONSTRUCTION


Housing: Roll-formed 21-gauge cold rolled steel.
Cover: Snap-on die-formed white steel.
Finish: Phosphate coated, baked white enamel with 85% reflectivity.

ELECTRICAL

Electronic instant start ballast, direct wire. 120v, 60Hz, UL/CUL dry or damp location listed.

OPTIONS

Add "SJT" for grounded cord & plug, and specify length, plus out end or back.
Add "CO" for convenience outlet, and specify on end or side.
Add "RIV" for Rivnut mounting inserts, specify location and #8 or 1/4-20 threads.
Add "277" for 277v wiring.

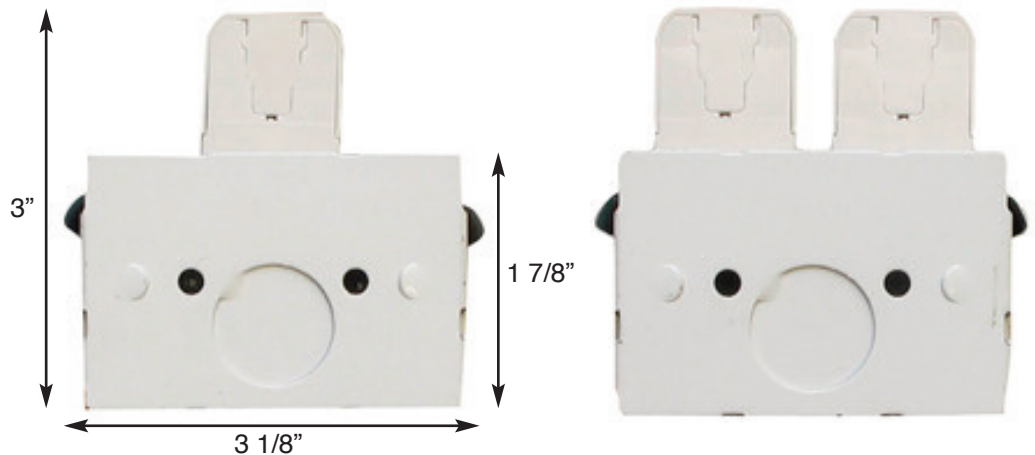

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
KDS114E	(1) F14T8	15"
KDS115E	(1) F15T8	18"
KDS117E	(1) F17T8	24"
KDS120E	(1) F20T12	24"
KDS125E	(1) F25T8	36"
KDS125T/E	(2) F25T8	72"
KDS132E	(1) F32T8	48"
KDS132T/E	(2) F32T8	96"
KDS140E	(1) F34T12	48"
KDS214E	(2) F14T8	15"
KDS215E	(2) F15T8	18"
KDS217E	(2) F17T8	24"
KDS225E	(2) F25T8	36"
KDS225T/E	(4) F25T8	72"
KDS232E	(2) F32T8	48"
KDS232T/E	(4) F32T8	96"