



## KDS TOP MOUNT STRIP SERIES

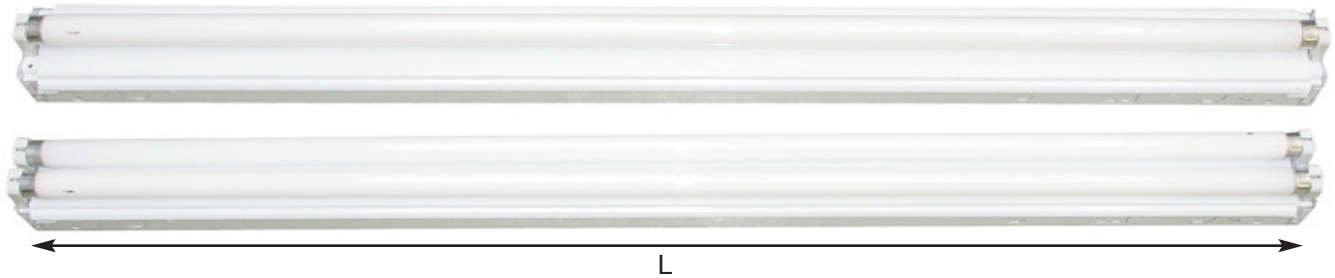

### DESCRIPTION

The basic fluorescent strip fixture configured with one or two lamps on top. Suitable for a wide range of commercial and industrial uses for concealed and general lighting. Uses T8 or T12 lamps.

Mounting: Fixtures designed for direct surface mount. Can also be chain, cable, or stem hung. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

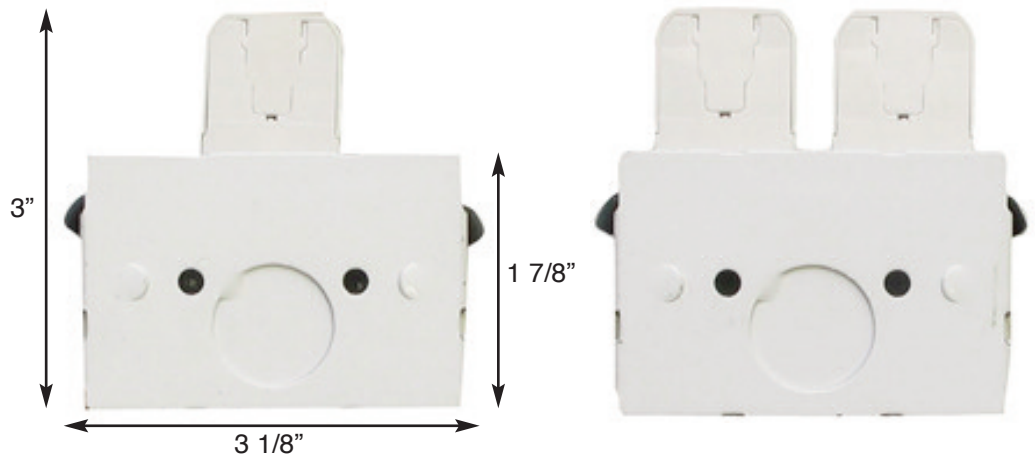

### CONSTRUCTION

Housing: Roll-formed 21-gauge cold rolled steel.

Cover: Snap-on die-formed white steel.

Finish: Phosphate coated, baked white enamel with 85% reflectivity.

### ELECTRICAL

Electronic instant start ballast, direct wire. 120v, 60Hz, UL/CUL dry or damp location listed.

### OPTIONS

Add "SJT" for grounded cord & plug, and specify length, plus out end or back.

Add "CO" for convenience outlet, and specify on end or side.

Add "RIV" for Rivnut mounting inserts, specify location and #8 or 1/4-20 threads.

Add "277" for 277v wiring.

### ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
KDS114E	(1) F14T8	15"
KDS115E	(1) F15T8	18"
KDS117E	(1) F17T8	24"
KDS120E	(1) F20T12	24"
KDS125E	(1) F25T8	36"
KDS125T/E	(2) F25T8	72"
KDS132E	(1) F32T8	48"
KDS132T/E	(2) F32T8	96"
KDS140E	(1) F34T12	48"
KDS214E	(2) F14T8	15"
KDS215E	(2) F15T8	18"
KDS217E	(2) F17T8	24"
KDS225E	(2) F25T8	36"
KDS225T/E	(4) F25T8	72"
KDS232E	(2) F32T8	48"
KDS232T/E	(4) F32T8	96"