

## MULTI MIDGET RIGHT ANGLE



### DESCRIPTION

A versatile miniature fluorescent strip fixture that can be configured with lamps on the top and side, top and both sides. Suitable for a wide range of applications where small size and maximum light is needed. Uses regular or high output T5 rapid start lamps.

**Mounting:** Fixtures designed for surface, chain, cable, or stem hanging. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

### CONSTRUCTION


**Housing:** Die-formed 21-gauge cold rolled steel.  
**Cover:** Bolt-on die-formed white steel.  
**Finish:** Phosphate coated, baked white enamel with 85% reflectivity.

### ELECTRICAL

120v, 60Hz, solid state electronic ballast, direct wire, UL/CUL listed for dry or damp locations.

### OPTIONS

Add "SJT" for grounded cord & plug, and specify length.  
Add "CO" for convenience outlet.

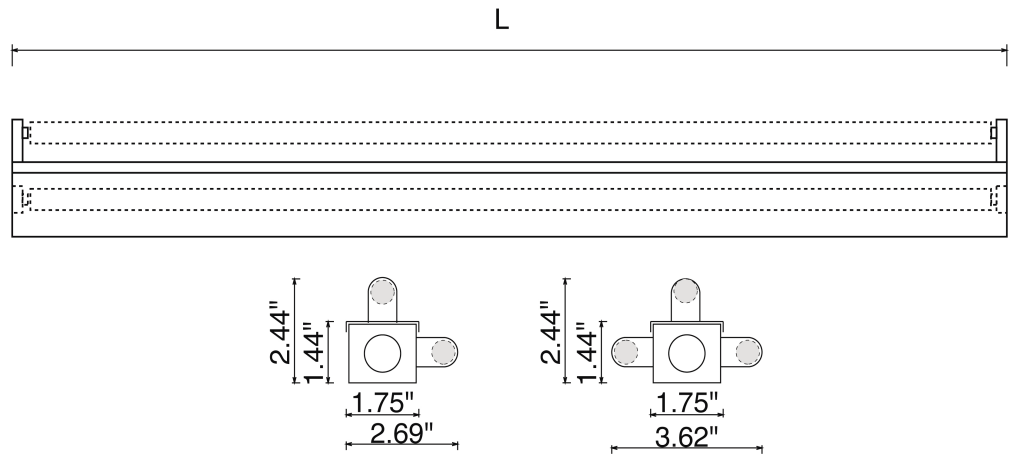

### ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Nominal Length (L)</u> (Call for Exact Specs)
MMRA214E	(2) F14T5	22"
MMRA221E	(2) F21T5	34"
MMRA224E/HO	(2) F24T5/HO	22"
MMRA228E	(2) F28T5	46"
MMRA235E	(2) F35T5	58"
MMRA239E/HO	(2) F39T5/HO	34"
MMRA254E/HO	(2) F54T5/HO	46"
MMRA314E	(3) F14T5	22"
MMRA321E	(3) F21T5	34"
MMRA328E	(3) F28T5	46"