



RIGHT ANGLE STRIP SERIES

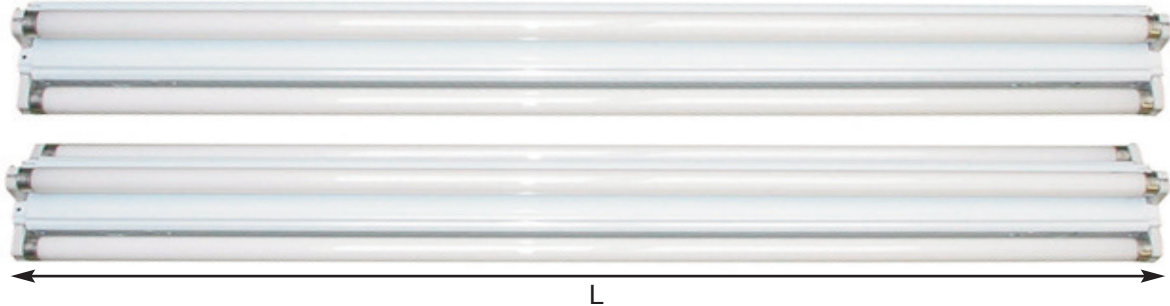

DESCRIPTION

The perfect fluorescent strip fixture for the most light in a small space at a reasonable price. Lamps configured on both sides and top or on one side and on top. Uses standard T8 lamps.

Mounting: Fixtures designed for direct surface mount. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

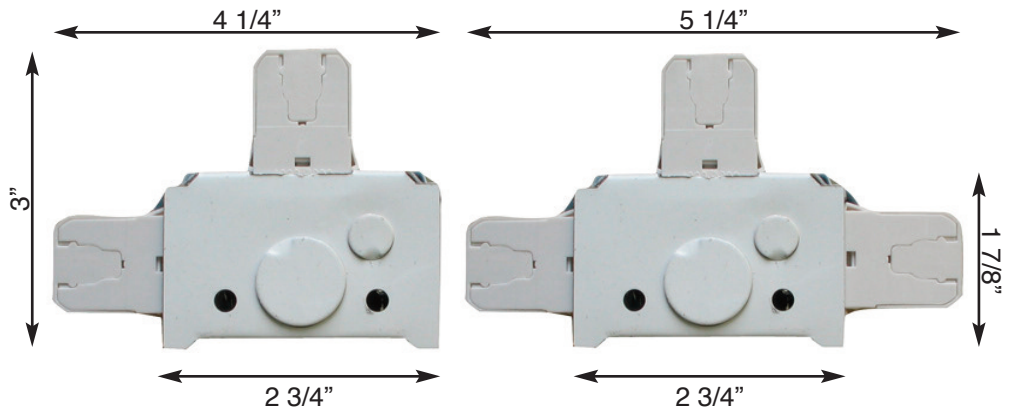

CONSTRUCTION

1-7/8" Housing: Die-formed 21-gauge cold rolled steel.
Cover: snap-on die-formed white steel.
Finish: Phosphate coated, baked white enamel with 85% reflectivity.

ELECTRICAL

Electronic instant start ballast, direct wire. 120v, 60Hz, UL/CUL dry or damp location listed.

OPTIONS

Add "SJT" for grounded cord & plug, and specify length, plus out end or back.
Add "CO" for convenience outlet.
Add "RIV" for Rivnut mounting inserts, specify location and #8 or 1/4-20 threads.
Add "277" for 277v wiring.

ORDERING INFORMATION

| <u>Model Number</u> | <u>Lamps</u> | <u>Length (L)</u> |
|---------------------|--------------|-------------------|
| RA214E | (2) F14T8 | 15" |
| RA215E | (2) F15T8 | 18" |
| RA217E | (2) F17T8 | 24" |
| RA225E | (2) F25T8 | 36" |
| RA225T/E | (4) F25T8 | 72" |
| RA232E | (2) F32T8 | 48" |
| RA232T/E | (4) F32T8 | 96" |
| RA314E | (3) F14T8 | 15" |
| RA315E | (3) F15T8 | 18" |
| RA317E | (3) F17T8 | 24" |
| RA325E | (3) F25T8 | 36" |
| RA332E | (3) F32T8 | 48" |