

SINGLE SIDE MOUNT STRIP SERIES



DESCRIPTION

A useful fluorescent strip fixture configured with the lamp on the side making it perfect for a wide range of applications where shallow size is needed in an economically priced fixture.

Mounting: Fixtures designed for direct surface mount. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

CONSTRUCTION

Housing: Die-formed 21-gauge cold rolled steel.

Cover: snap-on die-formed white steel.

Finish: Phosphate coated, baked white enamel with 85% reflectivity.

ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations.


OPTIONS

Add "SJT" for grounded cord & plug, and specify length as well as end or back.

Add "CO" for convenience outlet, specify on end or opposite side

Add "RIV" for Rivnut mounting inserts, specify location and #8-32 or 1/4-20 threads

Add "277" for 277v ballast

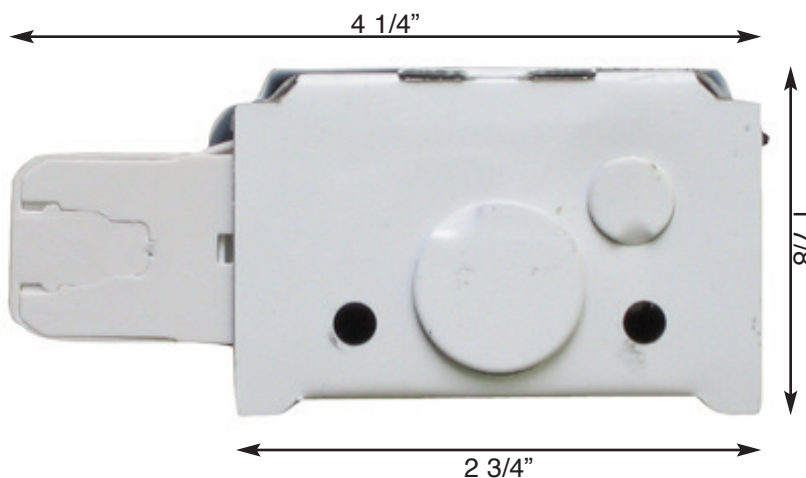

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
SM114E	(1) F14T8	15"
SM115E	(1) F15T8	18"
SM117E	(1) F17T8	24"
SM120E	(1) F20T12	24"
SM125E	(1) F25T8	36"
SM125T/E	(2) F25T8	72"
SM132E	(1) F32T8	48"
SM132T/E	(2) F32T8	96"