

UNDERCABINET FIXTURE SERIES



DESCRIPTION

This economical undercabinet fixture is low-profile and durable, using T8 lamps. The electronic ballast provides instant light.

Mounting: Fixtures designed for direct surface mount. Can be installed as individual units, in continuous rows or in conjunction with other fixtures.

CONSTRUCTION

Housing: Die-formed 21-gauge cold rolled steel.


Diffuser: Standard non-yellowing acrylic lens.

ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry and damp locations.

OPTIONS

Add "SJT" for grounded cord & plug, and specify length as well as end or back.
Add "CO" for convenience outlet, specify which end
Add "RO" for rocker switch
Add "277" for 277v ballast

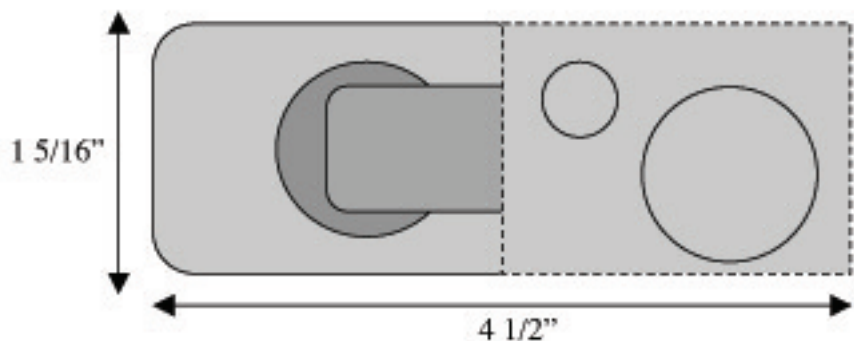

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
UC117E	(1) F17T8	24"
UC125E	(1) F25T8	36"
UC132E	(1) F32T8	48"