

WRAP FIXTURE SERIES



DESCRIPTION

A narrow and low profile 2 or 4 light fixture with ribbed wrap-around diffuser suitable for a wide range of ceiling applications. Uses 2 or 4 standard T8 lamps.

Mounting: Fixtures are designed for surface or stem hanging from the ceiling. Can be installed as individual units, in continuous rows, or in conjunction with other housings.

CONSTRUCTION

Housing: Die-formed 21-gauge cold rolled steel with baked white enamel finish.

Diffuser: Extruded clear prismatic and ribbed 100% acrylic non-yellowing lens. Lift and shift mounts onto housing.

ELECTRICAL

120v, 60Hz, electronic instant start ballast, direct wire, UL/CUL listed for dry or damp locations.


OPTIONS

Add "SJT" for grounded cord & plug, and specify length as well as end or back exit.

Add "EB" for emergency battery backup.

Add "277" for 277v ballast

Add "L" for low ballast factor rebate-eligible fixture

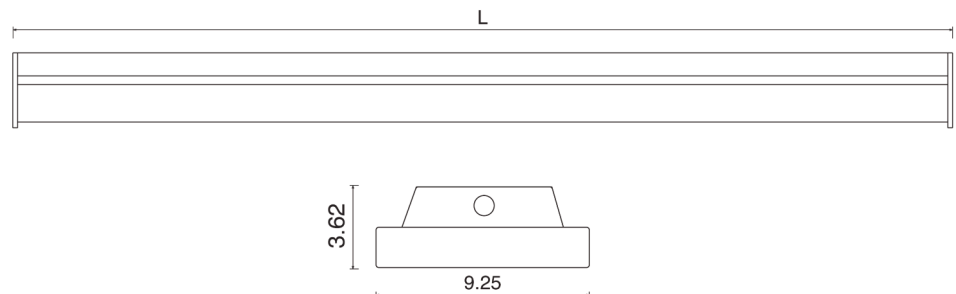

ORDERING INFORMATION

<u>Model Number</u>	<u>Lamps</u>	<u>Length (L)</u>
WRAP217E	(2) F17T8	24"
WRAP232E	(2) F32T8	48"
WRAP232T/E	(4) F32T8 (Tandem)	96"
WRAP432E	(4) F32T8	48"